

Housing for CS40 ANPR camera



KEY FEATURES

- ▶ Made from 316 Stainless Steel 76cm high
- ▶ Protective housing for camera and PSU
- ▶ Short-range applications

The bollard is optimised for short to mid-ranged ANPR for the following applications:

- ▶ Airport Access Points
- ▶ Car Park Entrances
- ▶ Barrier control systems

Cameras

The supported CS40 short range ANPR camera offer a cost effective solution with the bollard for many applications where cameras could be vulnerable to attack. The bollard also blends into the car park environment and puts the camera in the ideal location for barrier control.

Easy maintenance

The bollard housing offers easy camera access through a large lockable panel. The stainless steel housing protects the internal camera against knocks which can cause misalignment.


Technical Information

The CS40 utilise IR sensitive IP camera. The CS40 is an intelligent camera processing in the camera head transmitting compressed data packets to a server or third party back office.

TagMaster Recognition Engine

The cameras are complemented by the TagMaster recognition engine which is one of the fastest and most accurate in the world. The engine is supported full-time by our in-house development team.

PART NO. INFORMATION	DESCRIPTION
10764, Bollard	Bollard housing for CS40

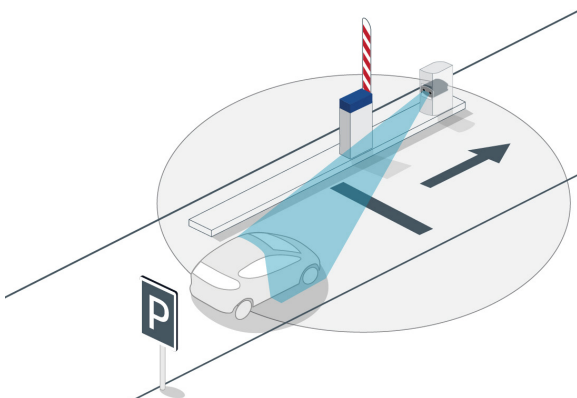

TECHNICAL INFORMATION

Input Power	:	24 V dc (PSU accepts 110-240VAC)
Power Consumption	:	<20 W with CS40 camera
ANPR Range Options	:	3 m to 10 metre range with CS40 short range
ANPR Camera	:	Can support CS40 non overview
Housing	:	316 Stainless Steel
Illuminators	:	See CS40 datasheet
Environmental	:	Housing is shipped with a base for easy installation and ease of set up
Dimensions and Mass	:	760 mm x 260 mm x 315 mm (H x W x D)