Wall mount bracket



TECHNICAL DATA - MECHANICAL

- Made of aluminium
- Adjustable joint
- Internal cable management
- Load rating: 25kg (55lb)
- Length: 204mm (8in)
- The sealing rings OWBIP2 or OWBIP3 ensure an IP66 protection to the housing
- Unit weight: 0.6kg (1.3lb)


DESCRIPTION


Wall bracket with joint. It offers vandal proof protection, due to an internal cable channel.


For IP55 protection, make a hole in the supplied sheath of 2mm less of the cable diameter and combine with the existing hole of the bracket. The sealing rings OWBIP2 or OWBIP3 ensure a housing of IP66 protection.


TECHNICHAL DRAWINGS

The indicated measurements are expressed in millimeters.

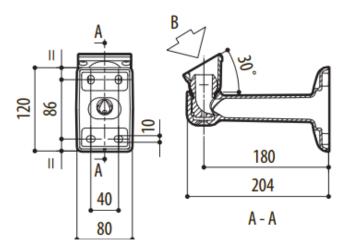







MAXIMUM INCLINATION



Pole mount adaptor



TECHNICAL DATA - MECHANICAL

- Made of aluminium
- Allows the internal cable management
- Load rating: 30kg (66lb)
- For pole diameters: from 65mm (2.6in) up to 140mm (5.5in)
- Unit weight: 0.9kg (2lb)

DESCRIPTION

Pole mount suitable for WBJA, WBMA, WBOVA2 and PTAC brackets. Allows the internal cable management. Epoxypolyester powder painted.

TECHNICHAL DRAWINGS

The indicated measurements are expressed in millimeters.

